
LeoMed

乐奥医疗 让生命更健康

Production and R&D Center: No. 10 Building, 18 Huashan Road, Xinbei District,
Changzhou, 213022, P.R.China
Tel: +86 519 85150730
Marketing Center: Room 401, Building 10, Pujiang Smart Plaza, No.2168,
Chenhang Road, Minhang District, Shanghai, P.R.China
Tel: +86 21 58921826

Digestive Endoscopy Accessories

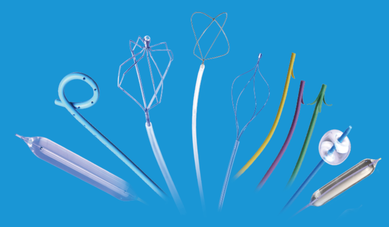

Make Life More Healthy

Single stage Dilation Balloons

LePuffer™

Intended Use

Used to dilate strictures of the biliary duct and the alimentary tract.

Product Feature

* Soft and tapered tip allows less invasive pass the stenosis.
* Radiopaque markers enable precise balloon placement under fluoroscopy.
* The unique catheter inner structure design improves the efficiency of balloon inflation and deflation
* Lower profile balloon folding technique optimizes product's pass-ability.
* Multi-size dilation balloon for esophageal, pyloric, colonic and biliary applications.

Specification

Choledochoscope Balloon

REF	Balloon			Catheter			Minimum Working Channel (mm)	Units/Box
	Length (mm)	Diam. (mm)	Nominal Pressure (atm)	Length (mm)	Diam. (mm)	Structure		
KZ0620P0	20	6	3	1100	1.7	OTW	2.0	1
KZ0820P0	20	8	3	1100	1.7	OTW	2.0	1

Specification

Esophagus, Pylorus, Biliary tract and Colon

REF	Balloon			Catheter			Minimum Working Channel (mm)	Units/Box
	Length (mm)	Diam. (mm)	Nominal Pressure (atm)	Length (mm)	Diam. (mm)	Structure		
KZ0630A0	30	6	3	1800	2.2	OTW	2.8	1
KZ0830A0	30	8	3	1800	2.2	OTW	2.8	1
KZ1030A0	30	10	3	1800	2.2	OTW	2.8	1
KZ1230A0	30	12	3	1800	2.2	OTW	2.8	1
KZ1530A0	30	15	3	1800	2.2	OTW	2.8	1
KZ0655C0	55	6	3	1800	2.4	OTW	2.8	1
KZ0855C0	55	8	3	1800	2.4	OTW	2.8	1
KZ1055C0	55	10	3	1800	2.4	OTW	2.8	1
KZ1255C0	55	12	3	1800	2.4	OTW	2.8	1
KZ1555C0	55	15	3	1800	2.4	OTW	2.8	1
KZ1855C0	55	18	3	1800	2.4	OTW	2.8	1
KZ2055C0	55	20	3	1800	2.4	OTW	3.2	1
KZ1580B0	80	15	3	1800	2.4	OTW	2.8	1
KZ1880B0	80	18	3	1800	2.4	OTW	2.8	1

Specification

Esophagus, Pylorus, Biliary tract and Colon

REF	Balloon			Catheter			Minimum Working Channel (mm)	Units/Box
	Length (mm)	Diam. (mm)	Nominal Pressure (atm)	Length (mm)	Diam. (mm)	Structure		
KZ0630A1	30	6	3	1800	2.2	RX	3.2	1
KZ0830A1	30	8	3	1800	2.2	RX	3.2	1
KZ1030A1	30	10	3	1800	2.2	RX	3.2	1
KZ1230A1	30	12	3	1800	2.2	RX	3.2	1
KZ1530A1	30	15	3	1800	2.2	RX	3.2	1
KZ0655C1	55	6	3	1800	2.4	RX	3.2	1
KZ0855C1	55	8	3	1800	2.4	RX	3.2	1
KZ1055C1	55	10	3	1800	2.4	RX	3.2	1
KZ1255C1	55	12	3	1800	2.4	RX	3.2	1
KZ1555C1	55	15	3	1800	2.4	RX	3.2	1
KZ1855C1	55	18	3	1800	2.4	RX	3.2	1
KZ2055C1	55	20	3	1800	2.4	RX	3.2	1
KZ1580B1	80	15	3	1800	2.4	RX	3.2	1
KZ1880B1	80	18	3	1800	2.4	RX	3.2	1