
LeoMed

乐奥医疗 让生命更健康

Production and R&D Center: No. 10 Building, 18 Huashan Road, Xinbei District,
Changzhou, 213022, P.R.China
Tel: +86 519 85150730
Marketing Center: Room 401, Building 10, Pujiang Smart Plaza, No.2168,
Chenhang Road, Minhang District, Shanghai, P.R.China
Tel: +86 21 58921826

Digestive Endoscopy Accessories

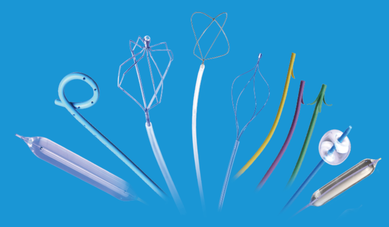

Make Life More Healthy

Stone Extraction Catheter

LeClear™

Intended Use

Used for endoscopic removal of biliary stones.

Product Feature

* Imported natural latex balloon with excellent durability and has better bio-compatibility, minimize allergic risk.
* Square shoulder of the balloon provides great fit to the biliary duct wall, facilitating stone removal
* Radiopaque markers on both ends of the balloon enhance visualization under X-Ray.
* Reinforced catheter allows multi-times retraction without excessive extension.
* One syringe with three markers, balloon dimension increased gradually with one time inflation, ease the manipulation of the device.

Specification

REF	Structure	Balloon Diam.（mm）	Minimum Working Channel（mm）	Working Length（mm）	Compatible Guidewire	Description	Units/Box
QS-1A00	OTW	8.5/11.5/15	2.8	2000	0.035”	Triple lumen,Injection-above	1
QS-1B00	OTW	8.5/11.5/15	2.8	2000	0.035”	Triple lumen,Injection-below	1
QS-2A00	OTW	11.5/15/18	3.2	2000	0.035”	Triple lumen,Injection-above	1
QS-2B00	OTW	11.5/15/18	3.2	2000	0.035”	Triple lumen,Injection-below	1
QS-1A10	RX	8.5/11.5/15	3.2	2000	0.035”	Triple lumen,Injection-above	1
QS-2A10	RX	11.5/15/18	3.2	2000	0.035”	Triple lumen,Injection-above	1


Leo Medical Co.,Ltd.

Biliary Draining Tubing

LeTube™

Intended Use

Used for endoscopic retrograde biliary drainage.

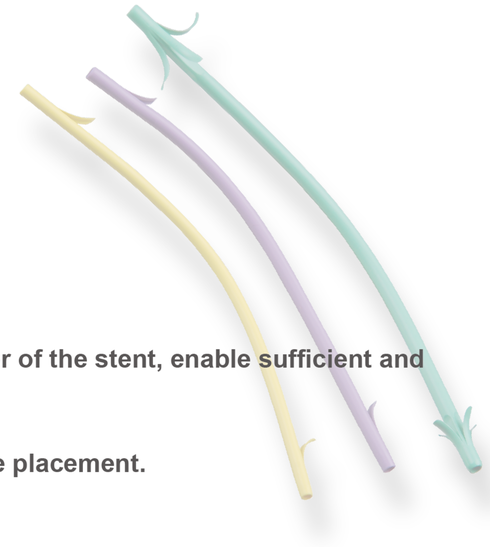

Product Feature

* The entire stent is visualized under X-ray .
* Made of fluoroplastic and maximized inner Diameter of the stent, enable sufficient and unblocked drainage effect.
* Repositionable preloaded version ensures accurate placement.
* Flaps prevent stent migration effectively.

Specification

REF		Tubing Length (cm)	Tubing Diam. (Fr)	Tubing Configuration	Compatible Guidewire	Minimum Working Channel（mm）	Units/Box	
Tubing Single	Pre-loaded						Tubing Single	Pre-loaded
WL-7-500	WL-7-500-P7	5	7.0	Straight	0.035"	2.8	1	1
WL-7-700	WL-7-700-P7	7	7.0	Straight	0.035"	2.8	1	1
WL-7-900	WL-7-900-P7	9	7.0	Straight	0.035"	2.8	1	1
WD-7-500	WD-7-500-P7	5	7.0	Proximal bend	0.035"	2.8	1	1
WD-7-700	WD-7-700-P7	7	7.0	Proximal bend	0.035"	2.8	1	1
WD-7-900	WD-7-900-P7	9	7.0	Proximal bend	0.035"	2.8	1	1
WC-7-500	WC-7-500-P7	5	7.0	Center bend	0.035"	2.8	1	1
WC-7-700	WC-7-700-P7	7	7.0	Center bend	0.035"	2.8	1	1
WC-7-900	WC-7-900-P7	9	7.0	Center bend	0.035"	2.8	1	1